




**ANDES PEAK  
SERIES**





## ANDES PEAK SERIES

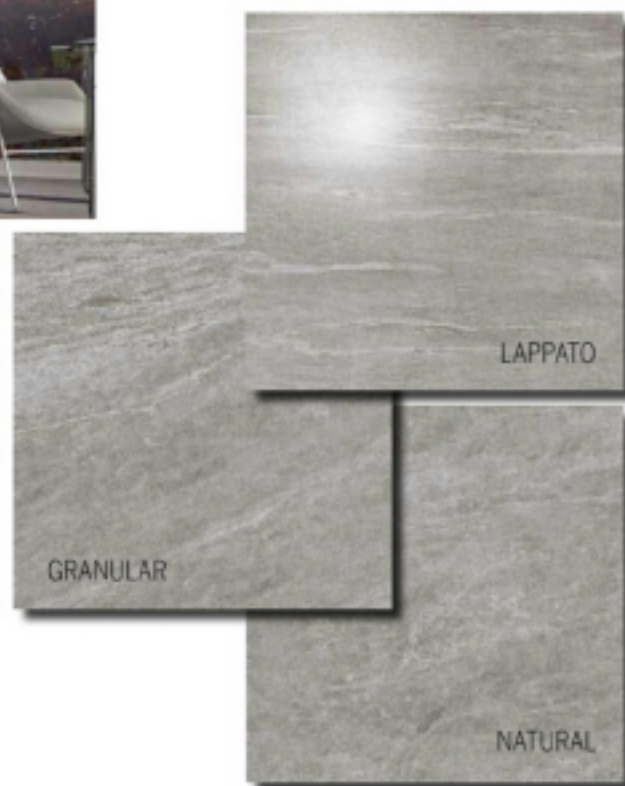

### FINISHING USE

AP10003N Grigio | 60x60cm / 24"x24"



## ANDES PEAK SERIES

**FINISHING USE** AP10005N Nero Piatt | 60x60cm / 24"x24"  
AP35005N Nero Piatt | 30x60cm / 12"x24"  
AP30005N Nero Piatt | 30x30cm / 12"x12"





## ANDES PEAK SERIES

### PAVING USE



AP40024 Bianco Nat | 45x95cm / 18x38"



### PAVING USE

AP50023 Nero Nat | 60x90cm / 24x36"



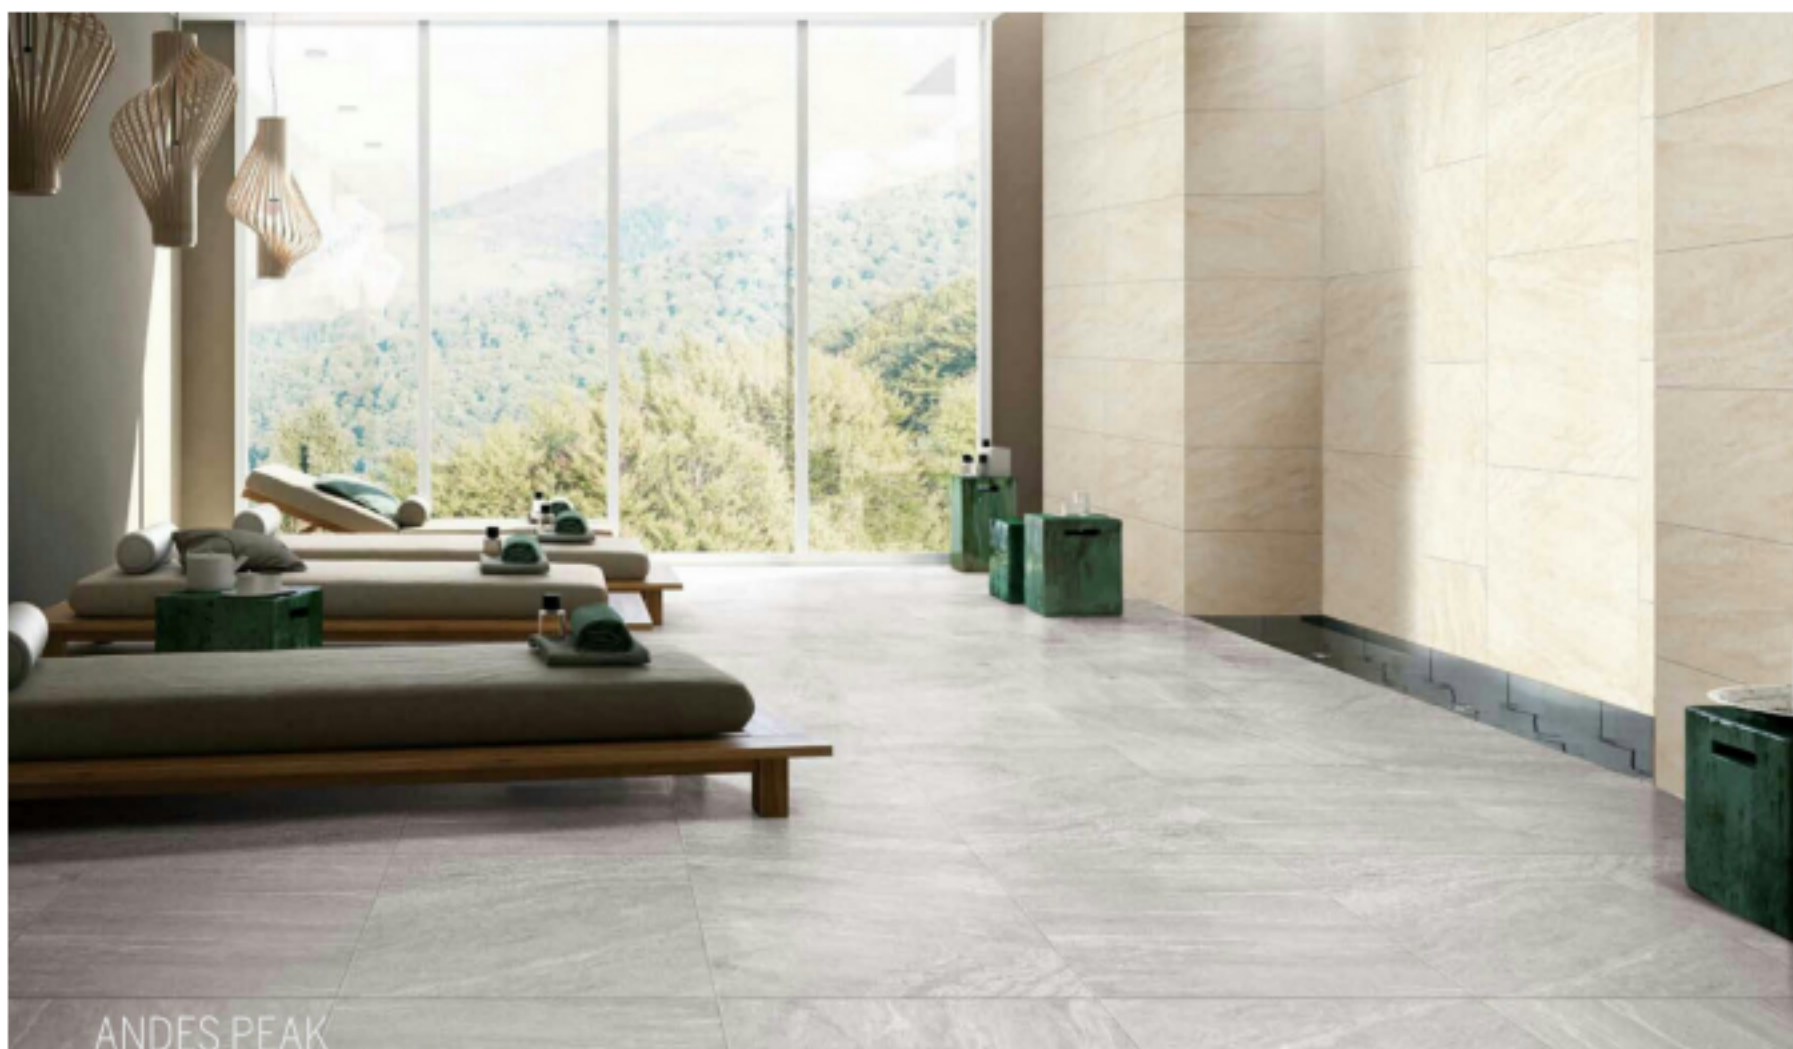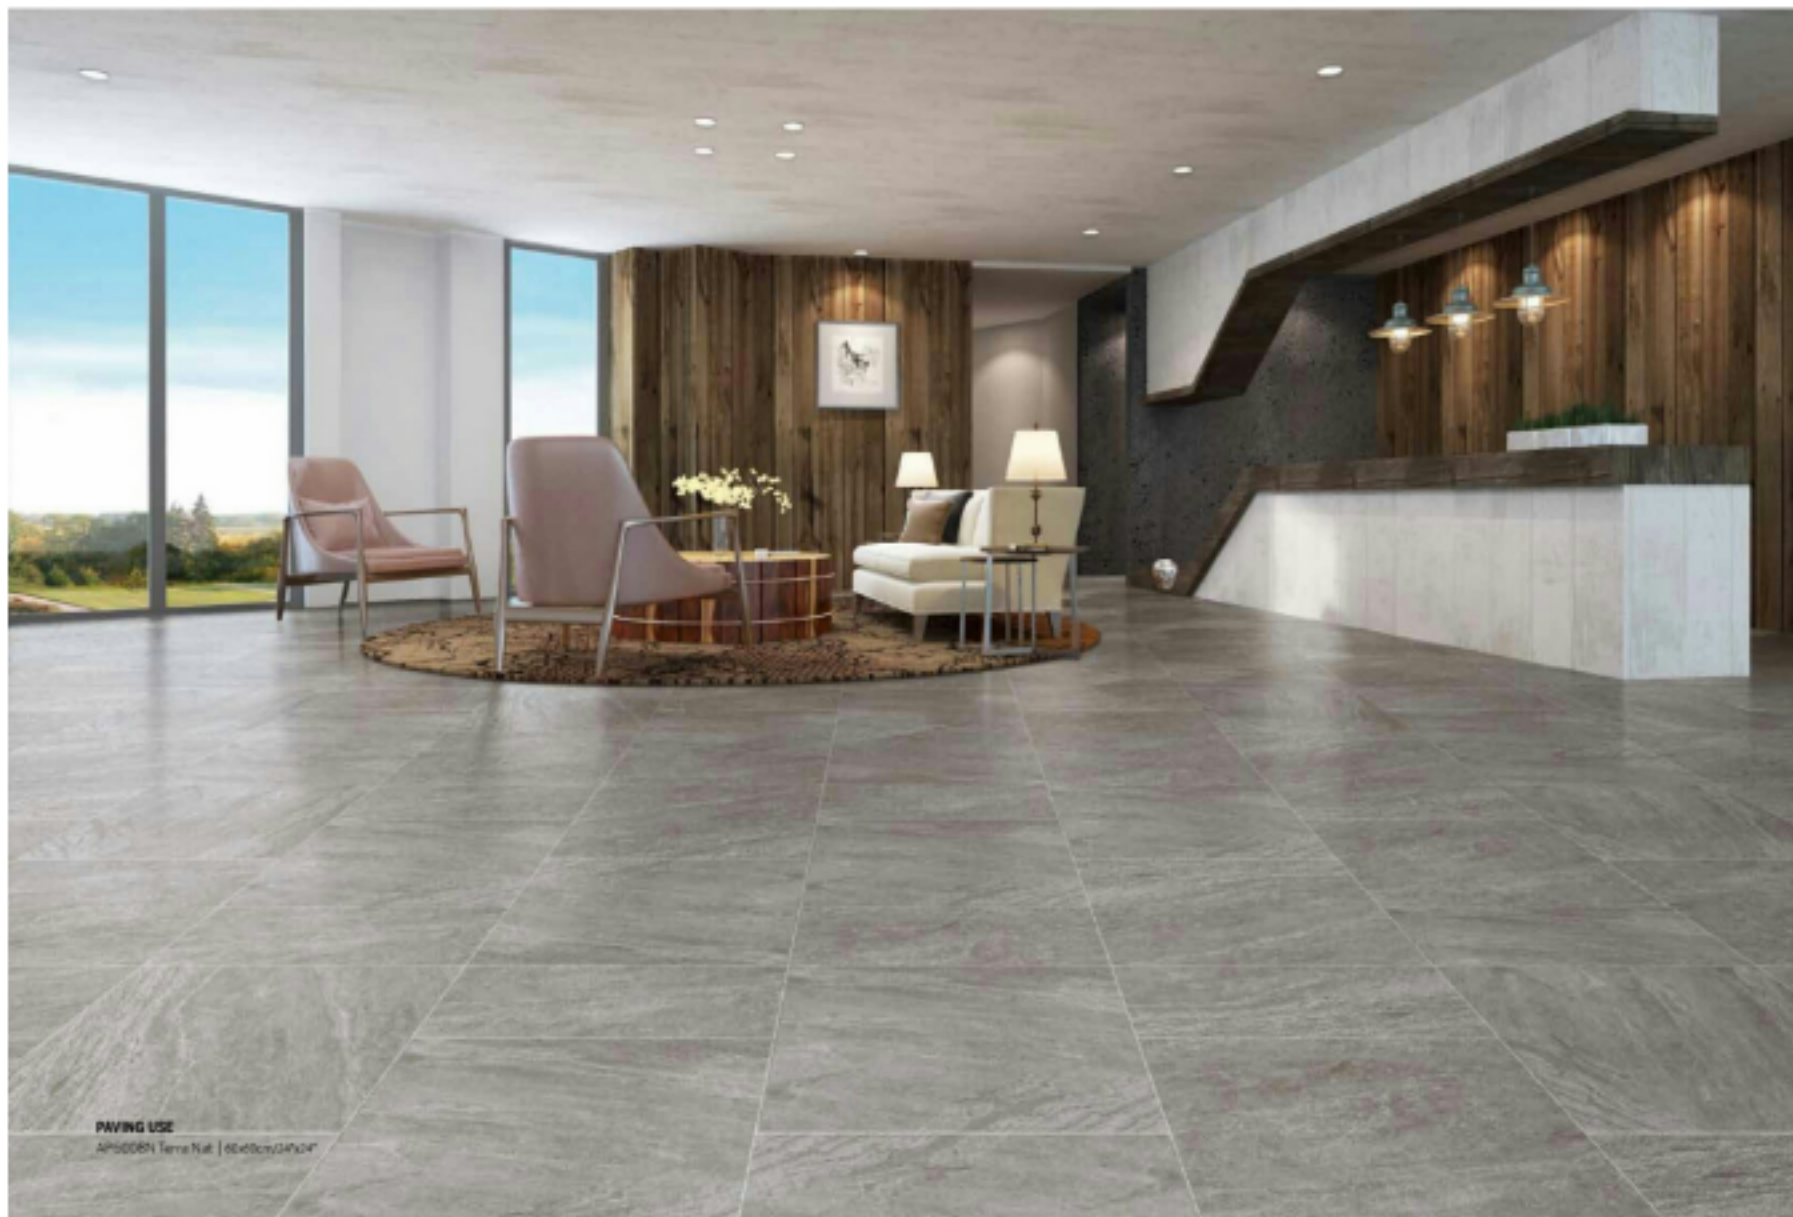

**PAVING USE** AP6003N Grigio Nut | 60x80cm / 24"x32"  
 AP6002L Avorio Lap | 60x80cm / 24"x32"  
 AP2402L Avorio Lap | 30x60cm / 12"x24"





**PAVING USE** AP6002G Avorio Grigio 60x80cm / 24"x32"  
AP3602G Avorio Grigio 36x60cm / 12"x24"

# ANDES PEAK SERIES

**SURFACE**

- Polished
- LAPPAKO
- Granite

**Size**

- 45x60cm / 18"x24"
- 60x60cm / 24"x24"
- 36x60cm / 12"x24"
- 36x36cm / 12"x12"

**Icons:**

- Polished
- LAPPAKO
- Granite
- PD IV
- PD V

AP6001 Bianco



AP4901 Bianco



# ANDES PEAK SERIES

**SURFACE**

- Polished
- LAPPAKO
- Granite

**Icons:**

- Polished
- LAPPAKO
- Granite
- PD IV
- PD V

AP6002 Avorio



AP4902 Avorio



| Packing Info |        |         |         |         |         |         |
|--------------|--------|---------|---------|---------|---------|---------|
| Size         | pieces | sqm/box | cms/box | sqm/box | sqm/box | sqm/box |
| 45x60 cm     | 3      | 1.215   | 30      | 35.40   | 30      | 9.00    |
| 60x60 cm     | 4      | 1.44    | 40      | 37.6    | 31      | 12.40   |
| 36x60 cm     | 8      | 1.44    | 40      | 37.6    | 31      | 12.40   |
| 36x36 cm     | 11     | 0.99    | 36      | 35.40   | 21      | 11.76   |

AP6003 Grigio



AP4903 Grigio



ANDES PEAK  
SERIES

SURFACE

Natural

LAPPAQ

Granite



AP6005 Nero



AP4905 Nero



| Packaging info |        |        |        |        |        |        |
|----------------|--------|--------|--------|--------|--------|--------|
| Size           | pieces | volume | weight | volume | weight | weight |
| 45x60 cm       | 3      | 1.215  | 30     | 35.45  | 30     | 8.60   |
| 60x60 cm       | 4      | 1.44   | 40     | 37.4   | 31     | 13.60  |
| 30x60 cm       | 8      | 1.44   | 40     | 37.4   | 31     | 13.60  |
| 30x30 cm       | 11     | 0.99   | 56     | 35.44  | 31     | 11.76  |

AP6008 Terra



AP4908 Terra



# PRODUCT REPORT

| Type of Test               | International Norm      | International Standard<br>(190 < S < 410cm <sup>2</sup> ) | Avangarde Typical Standard           |
|----------------------------|-------------------------|-----------------------------------------------------------|--------------------------------------|
| Water Absorption           | ISO 10545-3/ EN99       | Group B Ia, < 0.5%                                        | 0.18                                 |
| Dimension                  |                         |                                                           |                                      |
| Length&Width               | ISO 10545-2/ EN 98      | ± 0.50%                                                   | ± 0.30%                              |
| Thickness                  | ISO 10545-2/ EN 98      | ± 5.00%                                                   | ± 3.00%                              |
| Straightness of Sides      | ISO 10545-2/ EN 98      | ± 0.50%                                                   | ± 0.30%                              |
| Rectangularity             | ISO 10545-2/ EN 98      | ± 0.60%                                                   | ± 0.30%                              |
| Flatness of Surface        |                         |                                                           |                                      |
| Centre Curvature           | ISO 10545-2/ EN 98      | ± 0.50%                                                   | ± 0.30%                              |
| Warpage                    | ISO 10545-2/ EN 98      | ± 0.50%                                                   | ± 0.30%                              |
| Edge Curvature             | ISO 10545-2/ EN 98      | ± 0.50%                                                   | ± 0.30%                              |
|                            |                         |                                                           |                                      |
| Modulus of Rupture         | ISO 10545-4/ EN 100     | Min.35N/mm <sup>2</sup>                                   | Min.38N/mm <sup>2</sup>              |
| Deep Abrasion Test         | ISO 10545-6/ EN 102     | Max.175mm <sup>3</sup>                                    | Max.150mm <sup>3</sup>               |
| Thermal Shock              | ISO 10545-9/ EN 104     | No Damage                                                 | No Damage                            |
| Frost Resistance           | ISO 10545-12/ EN 202    | No visible alteration to the surface                      | No visible alteration to the surface |
| Chemical Resistance        | ISO 10545-13/ EN 106    | No visible alteration to the surface                      | No visible alteration to the surface |
| Moh's Hardness             | EN101                   | Min.6                                                     | > 6                                  |
| Colour Fastness            | SS301                   | No noticeable colour change                               | No noticeable colour change          |
| Slip Resistance(Ramp Test) | DIN 51130/AS4586(App D) | R9-R13                                                    | Natural finishing: R9                |
|                            |                         |                                                           | Lappato finishing: R10               |
|                            |                         |                                                           | Granular finishing: R11              |

## AVANGARDE CERAMICHE

86-90# HENAN INDUSTRY ZONE,WUGANG ROAD,CH-ANCHENG,FOSHAN CITY, GUANGDONG PROVINCE,CHINA

Tel:+86 757 89920000(50Lines)

Fax:+86 757 89920001/89920029

www.avangardeceramiche.com